

Diamond-like Carbon Films (DLC)/ High Efficient Antireflection (HEAR)

Part Number: DLC-AR-Si-3-5

Description: Hydrogenated diamond-like coatings (DLC) are used when the environmental conditions are considered harsh. It provides the toughest coating surface available in optics.

Substrate Material: Si

Polarization: Average polarization (S+P) / 2

Spectral Range: 3-5 μ m (MWIR)


Averaged Reflectance:
Averaged Reflectance in entire spectral range (Ravg)

Maximum Reflectance or Transmission:
Maximum Peak in entire spectral range (Rmax. or Tmax)

Minimum Reflectance or Transmission:
Minimum Peak in entire spectral range (Rmin. or Tmin.)

Measurement: Transmission on 25.4mm dia. wedged witness sample

Coating Material: Non-radioactive material to be used.

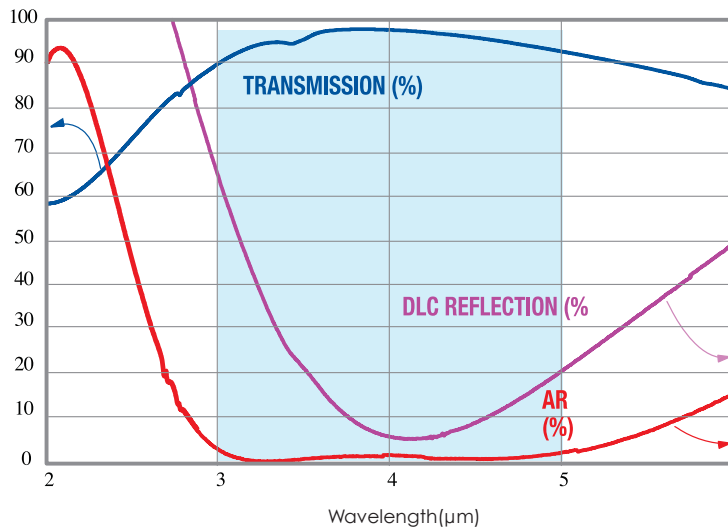

ITEM	CONDITION	REQUIREMENT
1.1 Reflectance	0-15° AOI	Ravg ≤ 4.0% and Rmax ≤ 15% per surface
1.2 Transmission	0° AOI	Tavg ≥ 93% and Tmin ≥ 85% on DLC/HEAR
1.3 Humidity	24 hrs, 95-100%RH, 120+/-4°F	MIL-F-48616 / MIL-C-48497C
1.4 Temperature	-80°F to 160°F for 2 hrs at each temperature	MIL-F-48616 / MIL-C-48497C
1.5 Solubility and Cleanability	Immersion test in Acetone and Alcohol for 1 hour instead of using Trichloroethylene	MIL-F-48616 / MIL-C-48497C
1.6 Adhesion	Adhesion (Cellophane tape test with quick removal)	MIL-F-48616 / MIL-C-48497C
1.7 Abrasion	Severe abrasion (20 cycles under 2 lb force)	MIL-F-48616 / MIL-C-48497C
1.8 Salt fog	72 hrs +	MIL-C-675
1.9 Wind screen wiper test	In a mixture of sand and water. For 5min at 1000 rpm	TS 1888, Para 5.4.3

ITEM	CONDITION	REQUIREMENT
2.1 Reflectance	0-15° AOI	Ravg ≤ 0.5%
2.2 Humidity	24 hrs, 95-100%RH, 120+/-4°F	MIL-F-48616 / MIL-C-48497C
2.3 Temperature	-80°F to 160°F for 2 hrs at each temperature	MIL-F-48616 / MIL-C-48497C
2.4 Solubility and Cleanability	Immersion test in Acetone and Alcohol for 1 hour	MIL-F-48616 / MIL-C-48497C
2.5 Adhesion	Adhesion (Cellophane tape test with quick removal)	MIL-F-48616 / MIL-C-48497C
2.6 Abrasion	Moderate abrasion (25 cycles under 1 lb force)	MIL-F-48616 / MIL-C-48497C

For Reference Only

ISP Optics Corp:
2603 Challenger Tech Court, Suite 100
Orlando, FL 32826
Tel: +800-909-4207
www.ispoptics.com

ISP Optics Latvia:
24a Ganību Dambis, korp 13
Rīga, LV-1005, Latvia
T: +371 67 323 779
sales@ispoptics.eu



A LightPath COMPANY