

High Durability Antireflection Coating (HDAR)

Part Number: HD-GE-3-5

Description: Xtreme Hi-Dur BBAR coatings withstand humidity, salt fog, and severe abrasion and are an alternative to DLC in situations where passing the windshield test is not required.

Substrate Material: Ge

Polarization: Average polarization (S+P)/2

Spectral Range: 3-5 μ m (MWIR)

Averaged Reflectance:

Averaged Reflectance in entire spectral range (Ravg)

Maximum Reflectance or Transmission:


Maximum Peak in entire spectral range (Rmax. or Tmax)

Minimum Reflectance or Transmission:

Minimum Peak in entire spectral range (Rmin. or Tmin.)

Measurement: Transmission on 25.4mm dia. x 1 mm thick window and reflectance on 6-8 degrees 25.4mm dia. wedged witness sample

Coating Material: Non-radioactive material to be used.

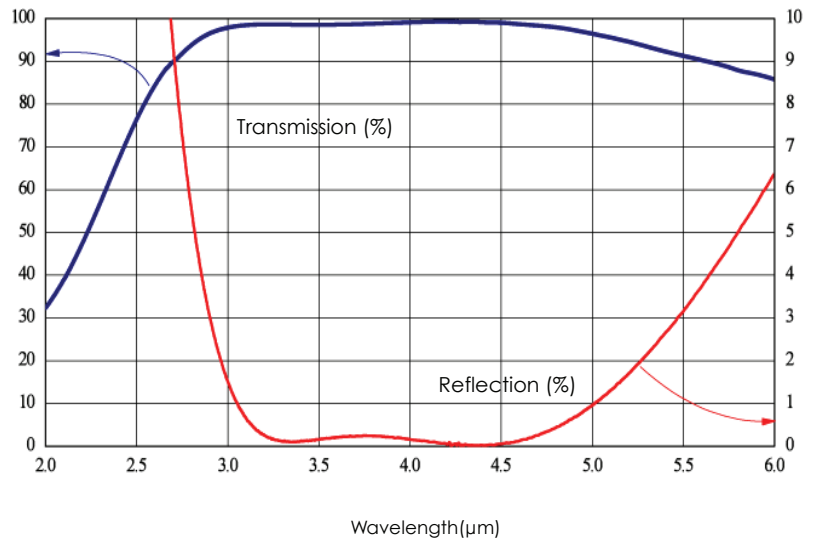

1. HDAR 3-5 μ m on external surface

ITEM	CONDITION	REQUIREMENT
1.1 Reflectance	0-15° AOI	Ravg \leq 0.5% and Rmax \leq 1.5% per surface
1.2 Transmission	0° AOI	Tavg \geq 97% and Tmin \geq 90% on HDAR/HEAR
1.3 Humidity	24 hrs, 95-100%RH, 120+/-4°F	MIL-F-48616 / MIL-C-48497C
1.4 Temperature	-80°F to 160°F for 2 hrs at each temperature	MIL-F-48616 / MIL-C-48497C
1.5 Solubility and Cleanability	Immersion test in Acetone and Alcohol for 1 hour instead of using Trichloroethylene	MIL-F-48616 / MIL-C-48497C
1.6 Adhesion	Adhesion (Cellophane tape test with quick removal)	MIL-F-48616 / MIL-C-48497C
1.7 Abrasion	Severe abrasion (20 cycles under 2 lb force)	MIL-F-48616 / MIL-C-48497C
1.8 Salt fog	72 hrs +	MIL-C-675

2. HEAR 3-5 μ m on internal surface

ITEM	CONDITION	REQUIREMENT
2.1 Reflectance	0-15° AOI	Ravg \leq 0.5% and Rmax \leq 1.5% per surface
2.2 Humidity	24 hrs, 95-100%RH, 120+/-4°F	MIL-F-48616 / MIL-C-48497C
2.3 Temperature	-80°F to 160°F for 2 hrs at each temperature	MIL-F-48616 / MIL-C-48497C
2.4 Solubility and Cleanability	Immersion test in Acetone and Alcohol for 1 hour instead of using Trichloroethylene	MIL-F-48616 / MIL-C-48497C
2.5 Adhesion	Adhesion (Cellophane tape test with quick removal)	MIL-F-48616 / MIL-C-48497C
2.6 Abrasion	Moderate abrasion (25 cycles under 1 lb force)	MIL-F-48616 / MIL-C-48497C

For Reference Only

ISP Optics Corp:
2603 Challenger Tech Court, Suite 100
Orlando, FL 32826
Tel: +800-909-4207
www.ispopitics.com

ISP Optics Latvia:
24a Ganību Dambis, korp 13
Rīga, LV-1005, Latvia
T: +371 67 323 779
sales@ispopitics.eu



A LightPath COMPANY